



# **UHF PET Jewelry Label**

This Jewelry adhesive label is complaint with EPC C1G2 (ISO18000-6C) standard, operating frequency is  $860 \sim 960 \text{MHz}$  (It can be used worldwide). Each tag has a unique ID and stores user data. The Jewelry adhesive label is designed for use in jewelry and small items applications where the tag may be in close proximity to small metal or metallic coated objects. It can used for brand anti-counterfeiting, inventory counting, anti-theft tracking, etc

### **Physical Features:**

Model:	RC9017-3
Material:	PET
Dimensions:	68x13mm
Working Temp:	-40~+85℃
Survive Temp:	-40~+85℃
IP Code:	IP68

### **RFID Features:**


RFID Standard:	EPC C1G2 (ISO18000-6C)
Chip Type:	Impinj Monza R6-P
EPC Memory:	128(96) bits
User Memory:	32(64) bits
Read Range(2W ERP FCC):	4.8m
Read Range(2W ERP ETSI):	4.2m

#### Other Features:


Data Storage:	> 10 years
Re-write:	100,000 times
Installation:	Adhesive
Customization:	Logo, barcode/QR code, number printing, encoding, design,etc
Package:	Reel core inner dimension: 76.2mm/ 3", 2500pcs/roll.
Application:	<ul> <li>Jewelry Security management</li> <li>Glasses Control Tracking</li> <li>Bag Tracking management, etc.</li> </ul>




### **Dimensions:**

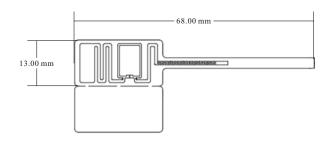

# Read Range(on metal jewelry):

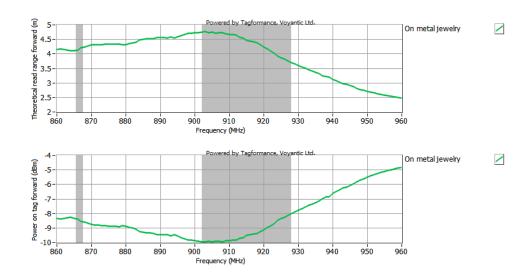

# Application:

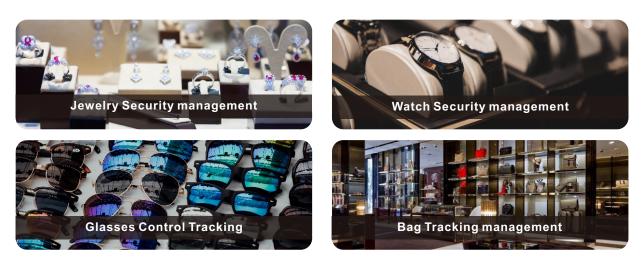

RICHRFID branch location:
Shenzhen | Shanghai | Beijing | Spain
For product and technology inquiries E-mail: info@richrfid.com

